


# PW-C RANGE



MAGNETICALLY DRIVEN, SINGLE-STAGE CENTRIFUGAL

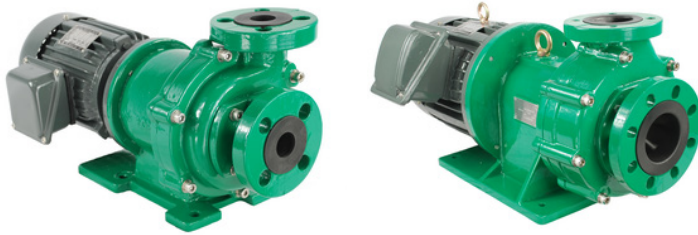

- ✓ Industrial pump for tough environments
- ✓ ETFE lined, cast iron construction increases mechanical strength and resistance to elevated temperatures
- ✓ Also suitable for outdoor installation or demanding environmental conditions
- ✓ Used in a wide variety of applications
- ✓ ATEX Certification available for PW-F Range

## MODEL IDENTIFICATION

**NH -400PW-C-FV**  
(1) (2) (3)

POS	DESCRIPTION	CODE
1	MODEL	400, 401, 402, ETC
2	BEARING	F = HIGH DENSITY CARBON BEARING, R = RULON, A = CERAMIC, SI = SIC BEARING & SPINDLE
3	O RING	V = VITON, N = NBR, E = EPDM

## SPECIFICATION

MODEL	FLANGE SIZE		BEST EFFICIENCY POINT (M - L/MIN)		MOTOR OUTPUT (KW)
	OUTLET (MM)	INLET (MM)	SPECIFIC GRAVITY	50HZ	
NH-250PW-C	25	25	1.2	7.0 - 135	0.37
NH-401PW-C	40	40	1.2	9.2 - 200	0.75
NH-402PW-C	40	50	1.2	16.0 - 260	1.5
NH-403PW-C	40	50	1.2	18.0 - 320	2.2
NH-405PW-C	40	50	1.2	25.0 - 380	3.7
NH-505PW-C	50	65	1.2	16.7 - 550	3.7
NH-507PW-C	50	65	1.2	25.7 - 550	5.5
NH-657PW-C	50	80	1.2	19.2 - 800	5.5
NH-6510PW-C	50	80	1.2	24.7 - 950	7.5
NH-6515PW-C	50	80	1.2	32.0 - 1,100	11
NH-6520PW-C	50	80	1.2	- - -	15



March May Ltd, Howard Road, Eaton Socon, St. Neots, Cambridgeshire, PE19 8NZ, UK


Tel: +44 (0) 1480 214444 Fax: +44 (0) 1480 405336 E-mail: sales@marchmay.co.uk Website: www.marchmay.co.uk

# PW-C RANGE



MAGNETICALLY DRIVEN, SINGLE-STAGE CENTRIFUGAL

## DIMENSIONS

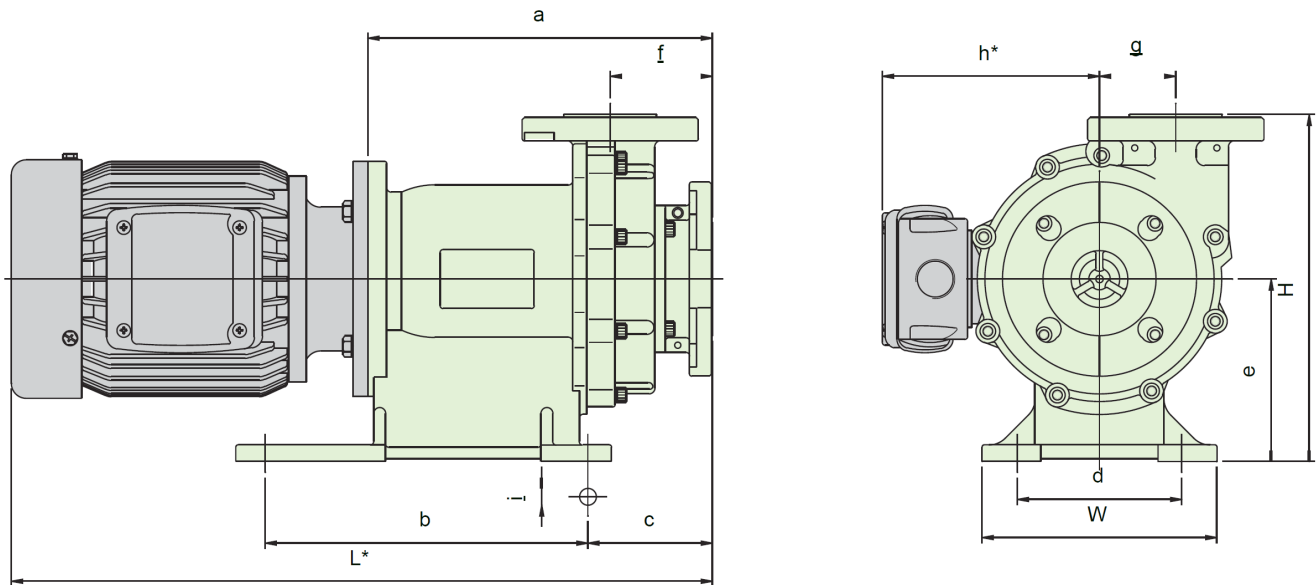

MODEL	W	H	L*	a	b	c	d	e	f	g	h*	i
NH-250PW-C	155	237	474	234	146	95	110	115	88	51	151	14
NH-401PW-C	195	275	492	260	250	111	130	135	104.5	57.5	160	14
NH-402PW-C	200	295	606	291	275	106	140	155	87	65	176	14
NH-403PW-C	200	295	606	291	275	106	140	155	87	65	176	14
NH-405PW-C	200	295	675.5	312.5	275	106	140	155	87	65	208	14
NH-505PW-C	260	325	712	349	305	130	210	175	110	62	208	14
NH-507PW-C	260	325	734	369	305	130	210	175	110	62	252	14
NH-657PW-C	280	360	743	378	320	193	220	175	118	0	252	14
NH-6510PW-C	280	360	743	378	320	193	220	175	118	0	252	14
NH-6515PW-C	350	385	918	408	320	193	300	200	118	0	285	14
NH-6520PW-C	350	385	918	408	320	193	300	200	118	0	285	14

NOTE: \* STANDARD DIMENSIONS WITH IEC 3-PHASE MOTOR



March May Ltd, Howard Road, Eaton Socon, St. Neots, Cambridgeshire, PE19 8NZ, UK

Tel: +44 (0) 1480 214444 Fax: +44 (0) 1480 405336 E-mail: sales@marchmay.co.uk Website: www.marchmay.co.uk

# PW-C RANGE




MAGNETICALLY DRIVEN, SINGLE-STAGE CENTRIFUGAL

## PERFORMANCE

PW-C Family Curve 50Hz

Nominal speed : 2,860 r.p.m

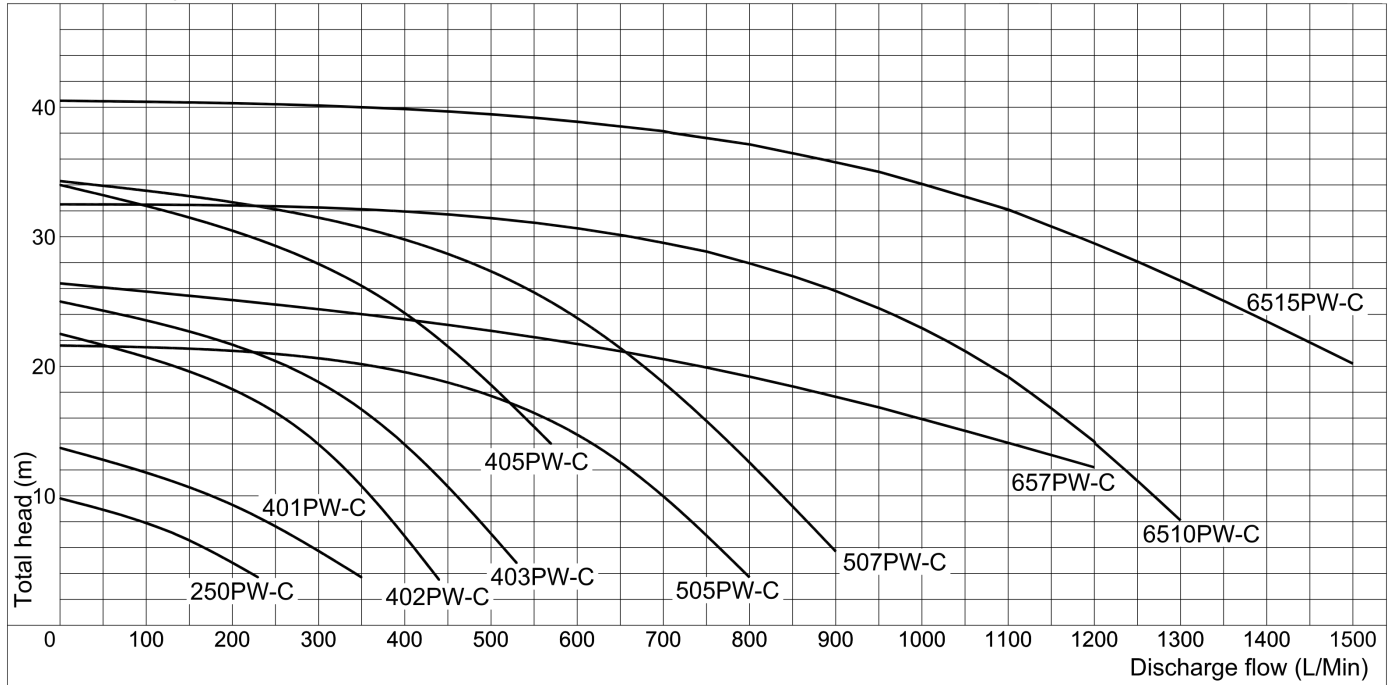

NOTE: 50HZ, BASED ON WATER. IMPELLERS TRIMMED TO SG1.2

PLEASE ASK FOR ADAPTED CURVES FOR OTHER SG VALUES AND REFER TO INDIVIDUAL DATASHEETS FOR 60HZ PERFORMANCE



March May Ltd, Howard Road, Eaton Socon, St. Neots, Cambridgeshire, PE19 8NZ, UK

Tel: +44 (0) 1480 214444 Fax: +44 (0) 1480 405336 E-mail: sales@marchmay.co.uk Website: www.marchmay.co.uk